

**Input:** 0-50 mVAC to 0-300 VAC, 0-1 mAAC to 0-900 mAAC  
**Output:** 0-1 V to 0-10 VDC,  $\pm 5$  VDC,  $\pm 10$  VDC, 0-1 mA to 0-20 mADC, 4-20 mADC

- Precision Internal AC/DC Converter
- Input and Output LoopTracker® LEDs
- Full 2000 V Input/Output/Power Isolation
- Functional Test Button

### Applications

- Convert an AC Signal to a DC Process Signal
- Monitor Voltage Ranges
- Convert, Amplify Low Level AC Signals

### AC Input Range

Factory configured, please specify input range  
 Consult factory for special ranges

API 6010 G voltage: 0-50 mVAC to 0-300 VAC  
 API 6010 G current: 0-1 mAAC to 0-900 mAAC

System voltages must not exceed socket voltage rating

### Input Impedance (Voltage Input)

API 6010 G: 220 k $\Omega$  minimum

### Input Voltage Burden (Current Input)

1.0 VRMS maximum

### Input Frequency

40 Hz to 1000 Hz sinusoidal

### Input Protection, Common Mode

750 VDC or 750 VACp

### LoopTracker

Variable brightness LEDs indicate I/O loop level and status

### DC Output Range

Factory configured, please specify output range

Voltage: 0-1 VDC to 0-10 VDC  
 Bipolar voltage:  $\pm 1$  VDC to  $\pm 10$  VDC  
 Current: 0-2 mADC to 0-20 mADC  
 20 V compliance, 1000  $\Omega$  at 20 mA

### Output Calibration

Multi-turn zero and span potentiometers  
 $\pm 15\%$  of adjustment range typical

### Output Loop Power Supply

20 VDC nominal, regulated, 25 mADC, max. ripple <10 mVRMS

### Output Test

Button sets output to test level when pressed  
 Factory set to approximately 50% of span  
 Specify if other output test setting is required

### Output Ripple and Noise

Less than 10 mVRMS

### Linearity

Better than  $\pm 0.1\%$  of span

### Ambient Temperature Range and Stability

-10°C to +60°C operating ambient  
 Better than  $\pm 0.02\%$  of span per °C stability, calculated, not tested

### Response Time

150 milliseconds typical

### Isolation



2000 VRMS minimum  
 Full isolation: power to input, power to output, input to output

### Installation Environment

IP 40, requires installation in panel or enclosure  
 Use API 008 or API 008 FS socket  
 Socket mounts to 35 mm DIN rail or can be surface mounted  
 UL 508C pollution degree 2 environments or better

### Power

Standard: 115 VAC  $\pm 10\%$ , 50/60 Hz, 2.5 W max.  
 A230 option: 230 VAC  $\pm 10\%$ , 50/60 Hz, 2.5 W max.  
 P option: 85-265 VAC 50/60 Hz, 60-300 VDC 2.5 W typ.  
 D option: 9-30 VDC, 2.5 W typical

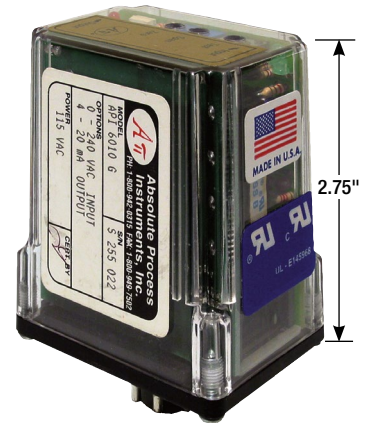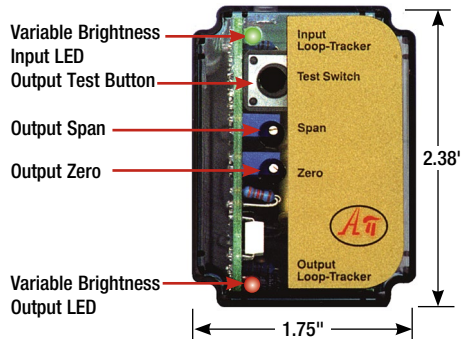

Hot Swappable  
 Plug-In Design



115 VAC, 230 VAC models  
 with input up to 150 VAC  
 without 5A option

Free Factory  
 I/O Setup!



Quick Link  
[api-usa.com/6010](http://api-usa.com/6010)

### Description

The API 6010 G accepts an AC voltage or current input and provides an optically isolated DC voltage or current output that is linearly related to the input. Typical applications include monitoring line, power supply, shunt, and motor voltages or current (either directly or with a current transducer) for control, preventive maintenance, etc.

The full 3-way (input, output, power) isolation makes this module useful for ground loop elimination or noise pickup reduction. The API 6010 G is factory configured to customer requirements. Consult the factory for assistance with special ranges.

### LoopTracker

API exclusive features include two LoopTracker LEDs (green for input, red for output) that vary in intensity with changes in the process input and output signals. These provide a quick visual picture of your process loop at all times and can greatly aid in saving time during initial startup and/or troubleshooting.

### Functional Test

An API exclusive feature includes the Functional Test Button to provide a fixed output (independent of the input) when held depressed. The test output level is factory set to 50% of output span. The functional test button greatly aids in saving time during initial startup and/or troubleshooting.

Model	Input	Output	Power
API 6010 G	Factory configured specify mVAC, VAC, or mAAC input range	Factory configured specify VDC or mADC output range	115 VAC
API 6010 G A230			230 VAC
API 6010 G P			85-265 VAC or 60-300 VDC
API 6010 G D			9-30 VDC

### Option—add to end of model number

U Conformal coating for moisture resistance

### Accessories—order as separate line item for API 6010 G

- API 008 8-pin socket
- API 008 FS 8-pin finger-safe socket
- API CLP1 Module hold-down spring for high vibration or mobile applications



API 008 FS  
 300 V Rating



API 008  
 600 V Rating



API CLP1

## Precautions

**WARNING!** All wiring must be performed by a qualified electrician or instrumentation engineer. See diagram for terminal designations and wiring examples. Consult factory for assistance.

**WARNING!** Avoid shock hazards! Turn signal input, output, and power off before connecting or disconnecting wiring, or removing or installing module.

## Précautions

**ATTENTION!** Tout le câblage doit être effectué par un électricien ou ingénieur en instrumentation qualifié. Voir le diagramme pour désignations des bornes et des exemples de câblage. Consulter l'usine pour assistance.

**ATTENTION!** Éviter les risques de choc! Fermez le signal d'entrée, le signal de sortie et l'alimentation électrique avant de connecter ou de déconnecter le câblage, ou de retirer ou d'installer le module.

API maintains a constant effort to upgrade and improve its products. Specifications are subject to change without notice. See [api-usa.com](http://api-usa.com) for latest product information. Consult factory for your specific requirements.

**WARNING:** This product can expose you to chemicals including lead, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Electrical Connections

Polarity must be observed for output wiring connections. If the output does not function, check wiring and polarity.

Each product is factory configured to your exact input and output ranges as indicated on the serial number label.

## Socket and Mounting

Install module in a protective panel or enclosure. Allow space around module for air flow. Use API 008 or API 008 FS socket. See specifications for maximum allowable socket voltages. The socket clips to a standard 35 mm DIN rail or can be mounted to a flat surface.

## Signal Input

For safety, input must be off while connecting wiring. The AC signal input is connected to terminals 5 and 6. Input voltages must not exceed socket voltage rating.

## Signal Output

Polarity must be observed when connecting the signal output to the load. The positive connection (+) is connected to terminal 7 and the negative (-) is connected to terminal 8.

The module provides 20 VDC power to the output loop (sourcing) when current output is ordered.

## Module Power


Check model/serial number label for module operating voltage to make sure it matches available power.

AC power is connected to terminals 1 and 3.

For DC powered modules, polarity **MUST** be observed.

Positive (+) is wired to terminal 1

Negative (-) is wired to terminal 3

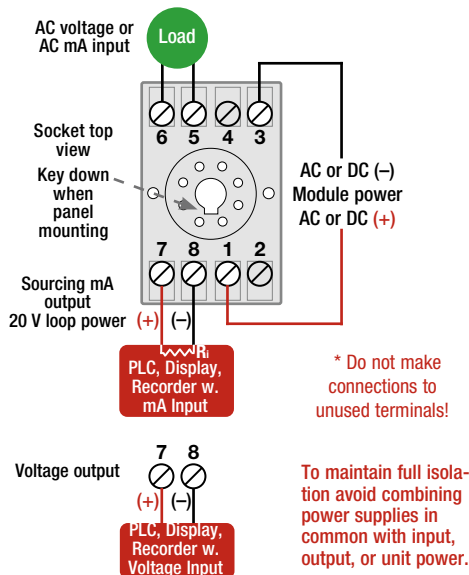

## Calibration

Input and output ranges as specified on your order are factory pre-configured (at 24°C ±1°C). The Zero and Span potentiometers can be used fine-tune the output range.

1. Power the module and allow a minimum 20 minute warm up time.
2. Using an accurate calibration source, provide an input to the module equal to the minimum input required for the application.
3. Using an accurate measurement device for the output, adjust the Zero potentiometer for the exact minimum output desired. The Zero control should only be adjusted when the input signal is at its minimum. This will produce the corresponding minimum output signal. For example: 4 mA for a 4-20 mA output or -10 V for a ±10V output.
4. Set the input at maximum, and adjust the Span pot for the exact maximum output desired. The Span pot should only be adjusted when the input signal is at its maximum. This will produce the corresponding maximum output signal.
5. Repeat adjustments for maximum accuracy.

## Functional Test Button

The functional test button provides a device on the output side of the loop (a panel meter, chart recorder, etc.) with a known good signal that can be used as a system diagnostic aid during initial start-up or during troubleshooting. It is factory set to 50% of output. When the button is released, the output will return to normal.

## Operation

The input is either amplified or attenuated, then filtered and processed by a precision full-wave rectification circuit. The result is passed thru a low pass active filter that provides a DC voltage representing the average value of the input. This DC voltage is passed through an optical isolation circuit to the output stage.

The green LoopTracker® input LED provides a visual indication that a signal is being sensed by the input circuitry of the module. It also indicates the input signal strength by changing in intensity as the process changes from minimum to maximum.

If the LED fails to illuminate, or fails to change in intensity as the process changes, check the module power or signal input wiring. Note that it may be difficult to see the LEDs under bright lighting conditions.

The red LoopTracker output LED provides a visual indication that the output signal is functioning. It becomes brighter as the input and the corresponding output change from minimum to maximum.

For current outputs, the red LED will only light if the output loop current path is complete. For either current or voltage outputs, failure to illuminate or a failure to change in intensity as the process changes may indicate a problem with the module power or signal output wiring.